



REMEZA

AIR COMPRESSORS



CABEX CO. s.r.l.

Import Export



AIR COMPRESSORS FOR MEDICAL PURPOSES

ADVANCED TECHNOLOGY IN THE FIELD OF COMPRESSED AIR

JSC «Remeza» was founded in 1989. The main aim of the company – production of modern reliable affordable compressor equipment, using high-quality components from leading manufacturers.

In this catalog JSC «Remeza» offers compressors, designed to provide high-quality compressed air laboratory and medical institutions. Lineup compressor equipment ensures compressed air as separate devices (apparatus), and to centralize all health facilities.

– Oil-free piston compressors for compressed air anesthesia equipment and ventilators (page 3).

– Oil-free piston compressors for the compressed air supply of dental, medical, lab equipment and tools (page 4-9).

– Oil-free compressors, piston and scroll centralized compressed air supply of various medical institutions (page 10-14).

– Compressor stations MBK based on screw or scroll compressors for centralized compressed air supply of hospital health care network lines with pressure of 5 and / or 8 Bar(g) (page 15).

Standard options:

- option «K» – in noise isolation house;
- option «M» – membrane air dryer (dew point -20°C);
- option «D» – version with refrigeration dryer;
- inner polymeric coating of air tank.


Additional options on request:

- production of compressors to another, other than those specified in the catalog pressure and supply voltage;
- galvanized air tank;
- selection and delivery of air treatment equipment in accordance with the specified parameters.

Oil-free compressors for centralized compressed air supply of various medical institutions. Oil free scroll air compressors

Main characteristics

- oil free scroll compressors;
- inner polymeric coating of air tank;
- low noise level and vibration;
- automatic operation;
- noise isolation house;
- membrane air dryer (dew point -20°C), desiccant air dryer (dew point -20°C) or refrigerant air dryer.

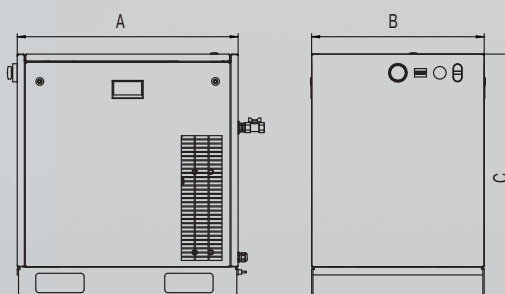

2,2 kW

4,0 kW

5,5 kW

7,5 kW

MODEL	bar	l/min	kW	V	dB	kg	Dimension A x B x C, mm
KC3-8(10)A	8/10	200/175	2,2	230	62	115	790×550×765
KC3-8(10)AM	8/10	170/150	2,2	230	62	120	850×550×765
KC3-8(10)	8/10	250/215	2,2	400	62	115	790×550×765
KC3-8(10)M	8/10	210/180	2,2	400	62	120	850×550×765
KC5-8(10)	8/10	410/345	4,0	400	63	125	790×550×765
KC5-8(10)M	8/10	350/300	4,0	400	63	135	850×550×765
KC7-8(10)	8/10	605/470	5,5	400	64	215	980×670×1020
KC7-8(10)M	8/10	520/400	5,5	400	64	230	1100×670×1020
KC10-8	8	820	7,5	400	65	225	980×670×1020
KC10-8M	8	700	7,5	400	65	240	1080×670×1020



Option M – with membrane air dryer










- 2,2 kW
- 4,0 kW
- 5,5 kW
- 7,5 kW



◀ Option M – with membrane air dryer



MODEL	 L	 bar	 l/min	 kW	 V	 dB	 kg	Dimension A x B x C, mm
KC3-8(10)-270A	270	8/10	200/175	2,2	230	62	210	1600x600x1360
KC3-8(10)-270AD	270	8/10	200/175	2,2	230	62	235	1600x600x1360
KC3-8(10)-270AM	270	8/10	170/150	2,2	230	62	235	1600x600x1360
KC3-8(10)-270	270	8/10	250/215	2,2	400	62	210	1600x600x1360
KC3-8(10)-270D	270	8/10	250/215	2,2	400	62	235	1600x600x1360
KC3-8(10)-270M	270	8/10	210/180	2,2	400	62	220	1600x600x1360
KC5-8(10)-270	270	8/10	410/345	4,0	400	63	225	1600x600x1360
KC5-8(10)-270D	270	8/10	410/345	4,0	400	63	250	1600x600x1360
KC5-8(10)-270M	270	8/10	350/300	4,0	400	63	235	1600x600x1360
KC7-8(10)-270	270	8/10	605/470	5,5	400	64	310	1600x670x1615
KC7-8(10)-270D	270	8/10	605/470	5,5	400	64	335	1600x670x1615
KC7-8(10)-270M	270	8/10	520/400	5,5	400	64	350	1600x670x1615
KC10-8-270	270	8	820	7,5	400	65	320	1600x670x1615
KC10-8-270D	270	8	820	7,5	400	65	345	1600x670x1615
KC10-8-270M	270	8	700	7,5	400	65	360	1600x670x1615


Options:
D – integrated refrigeration air dryer
M – with membrane air dryer, Dew point temperature -20 °C







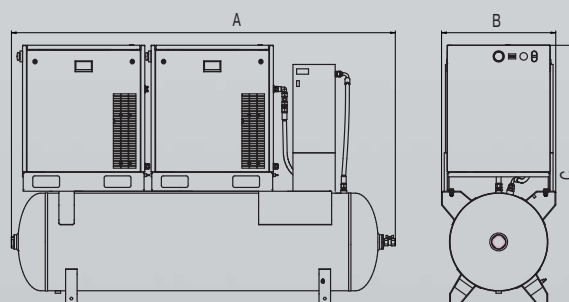


4,0+4,0 kW
5,5+5,5 kW
7,5+7,5 kW



Option M – with membrane air dryer



MODEL	 L	 bar	 l/min	 kW	 V	 dB	 kg	Dimensionz A x B x C, mm
KC5-8(10)-500T	500	8/10	820/690	4,0+4,0	400	68	410	1930x620x1450
KC5-8(10)-500TM	500	8/10	700/600	4,0+4,0	400	68	430	1930x760x1450
KC7-8(10)-500T	500	8/10	1210/940	5,5+5,5	400	69	620	2050x670x1780
KC7-8(10)-500TM	500	8/10	1040/800	5,5+5,5	400	69	650	2050x900x1780
KC10-8-500T	500	8	1640	7,5+7,5	400	70	640	2050x670x1780
KC10-8-500TM	500	8	1400	7,5+7,5	400	70	670	2050x900x1780

Options:
M – with membrane air dryer, Dew point temperature -20 °C



www.remeza.com
info@remeza.com

www.cabex.eu
(Planet Industry)
info@cabex.eu

ADVANCED TECHNOLOGY IN THE FIELD OF COMPRESSED AIR