


CONTI® V MULTIRIB

V-ribbed belts according to DIN 7867, for high gear ratios, high belt speeds, small pulley diameters and back-tension rollers

Properties:

- temperature range from -30°C to +80°C
- enhanced running smoothness
- suited for counterbending / back-tensioners
- electrically conductive to ISO 1813
- conditionally resistant to oil
- suitable for tropical climates
- dust-proof

Belt structure:

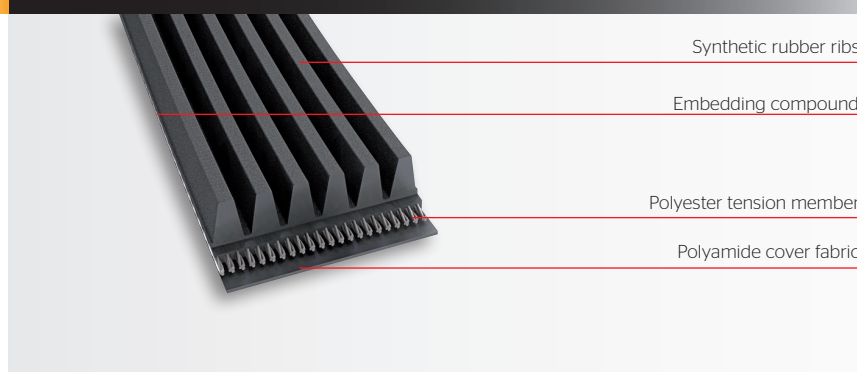

Profile	Length range L _b (mm) / L _b (1/10 inch)
PJ	356 - 2489 / 140 - 980
PK	635 - 2550 / 250 - 1004
PL	991 - 7055 / 390 - 2777
PM	2134 - 16764 / 840 - 6600

PH Profile on request.

Types installed on REMEZA air compressor

Q\ Å[â^	Ö^•&ä ç }
TVÜHŠ	ÔÜÞVQÖÖPÁUŠYĚKÖÖŠVÁHŠÄFH { ÅÖÄÄ•D
TVÜÍŠ	ÔÜÞVQÖÖPÁUŠYĚKÖÖŠVÁÍŠÄFH { ÅÖÄÄ•D
TVÜĎŠ	ÔÜÞVQÖÖPÁUŠYĚKÖÖŠVÁĎŠÄFH { ÅÖÄÄ•D
TVÜİŠ	ÔÜÞVQÖÖPÁUŠYĚKÖÖŠVÁİŠÄFH { ÅÖÄÄ•D